




# WX21 & WX31 Displays


## Product Features

- Complete plug and play solution
- Seamless megapixel display in any existing space
- Shared display for visual collaboration
- Compact and lightweight
- Calibrate in seconds

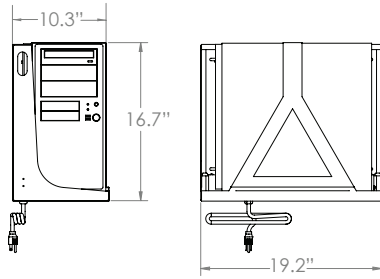

(Computer Shelf)

Dimension	WX21	WX31
A	139"	204.9"
B	136"	202.1"
C	90.4"	156.5"

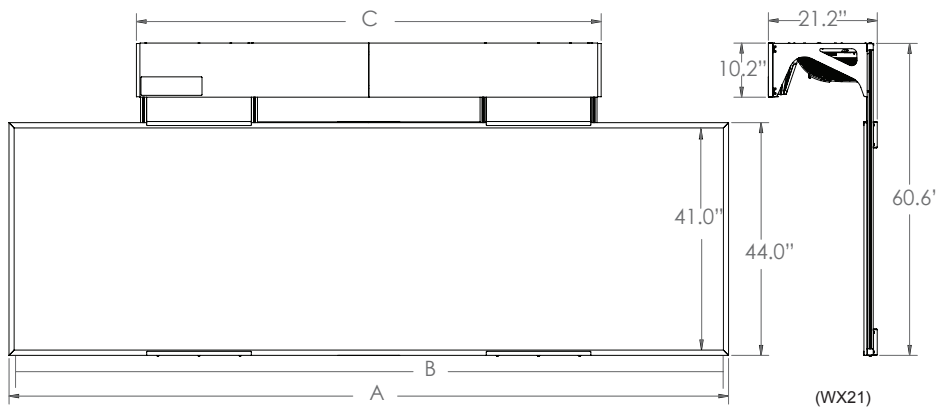

(WX21)

## Specifications

Model	WX21	WX21-HD	WX31	WX31-HD
<b>Screen</b>				
Width	139 in (353.1 cm)		202.1 in (513.3 cm)	
Height	41 in (104.1 cm)		41 in (104.1 cm)	
Depth	0.5 in (1.3 cm)		0.5 in (1.3 cm)	
Weight	60 lb (27.2 kg)		90 lb (40.8 kg)	
<b>Overall Display</b>				
Width	139 in (353.1 cm)		204.9 in (520.4 cm)	
Height	60.6 in (153.9 cm)		60.6 in (153.9 cm)	
Depth	21.2 in (53.8 cm)		21.2 in (53.8 cm)	
Weight	164 lb (74.4 kg)		244 lb (110.7 kg)	
<b>Computer Shelf</b>				
Width	19.2 in (48.8 cm)		19.2 in (48.8 cm)	
Height	16.6 in (42.2 cm)		16.6 in (42.2 cm)	
Depth	10.3 in (26.2 cm)		10.3 in (26.2 cm)	
Weight (PC included)	32 lb (14.5 kg)		32 lb (14.5 kg)	
Shipping Weight	250 lb (113.40 kg)		340 lb (154.22 kg)	
Screen Type	Solid (honey comb aluminum)		Solid (honey comb aluminum)	
Typical Resolution	2200 x 720	3300 x 1080	3300 x 720	4560 x 1080
Aspect Ratio	3.20:1		4.70:1	
Brightness	500 nits	600 nits	500 nits	600 nits
Brightness Uniformity (w/ Correction)	95%		95%	
Contrast Ratio	1500:1		1500:1	
Colors	16.7 million		16.7 million	
Auto Color and Brightness Balancing	Included with Sol automatic geometric and brightness uniformity			
Imaging Technology	DLP by Texas Instruments		DLP by Texas Instruments	
Full Viewing Angle	180 degrees		180 degrees	
Lamp Life	4000 hrs		4000 hrs	
Power Consumption	800 W		1180 W	
Operating Temperature Range	5 to 40 °C (41 to 104 °F)   5 to 35 °C (41 to 95 °F)		5 to 40 °C (41 to 104 °F)   5 to 35 °C (41 to 95 °F)	
Operating Humidity Range	5% to 95% RH non-condensing		5% to 95% RH non-condensing	
Serviceability	Front service		Front service	
Data Inputs	USB, RJ45		USB, RJ45	
DVI-I Input	Available		Available	
Wall Mounted	Standard		Standard	

\*All specifications are subject to change without prior notice.

Delta Group Website :  
www.deltaww.com

Product Website :  
www.delta-ameras.com/  
displaysolutions

Contact E-mail :  
displaysales@delta-corp.com

### Europe

#### FRANCE

Delta Electronics (France) S.A.  
ZI du bois Chaland 2 15 rue des  
Pyrénées, Lisses, 91056 Evry  
Cedex, France

#### NETHERLANDS

Delta Electronics Europe  
Zandsteen 15, 2132 MZ  
Hoofddorp,  
The Netherlands

#### SLOVAKIA

Delta Electronics (Slovakia) s.r.o.  
Priemyselna ulica 4600/1  
018 41 Dubnica nad Vahom,  
Slovakia

### North America

#### USA / FREMONT

Delta Products Corporation  
4405 Cushing Parkway,  
Fremont, CA 94538, U.S.A.

#### USA / PORTLAND

Delta Products Corporation  
1600 NW Compton Drive,  
Suite 100, Hillsboro OR 97006,  
U.S.A.

### Asia

#### TAIWAN

Delta Electronics, Inc.  
186 Ruey Kuang Road, Neihu,  
Taipei 11491, Taiwan

#### KOREA

Delta Electronics (Korea) Inc.  
234-9, Duck soo Building 7F,  
Nonhyun-dong, Kangnam-Gu,  
Seoul, Korea 135-010

#### JAPAN

Delta Electronics (Japan) Inc.  
Delta Shibadaimon Building,  
2-1-14 Shibadaimon, Minato-Ku,  
Tokyo, 105-0012, Japan

#### THAILAND

Delta Electronics (Thailand) PCL.  
909 Soi 9, E.P.Z., Bangpoo  
Industrial Estate, Moo 4, Pattana  
1 Rd., T.Prakasa, A.Muang  
Samutprakarn 10280, Thailand

#### INDIA

Delta India Electronics Pvt. Ltd.  
Plot No 43, Sector 35, HSIIDC,  
Gurgaon 122001, Haryana,  
India

#### CHINA

Delta Electronics (Jiang Su) Ltd.  
1688 Jiangxing East Road,  
Wujiang  
Economic Development Zone,  
Wujiang City, Jiang Su  
Province, China

#### SINGAPORE

Delta Electronics (Singapore)  
1, Kaki Bukit Road 1, #03 -29,  
Enterprise One, Singapore  
415934